
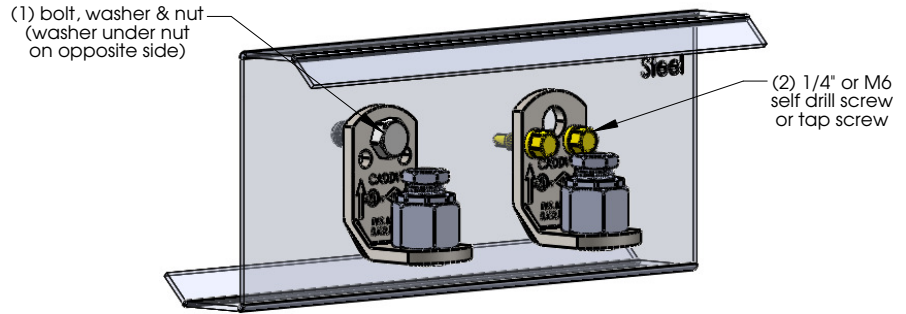
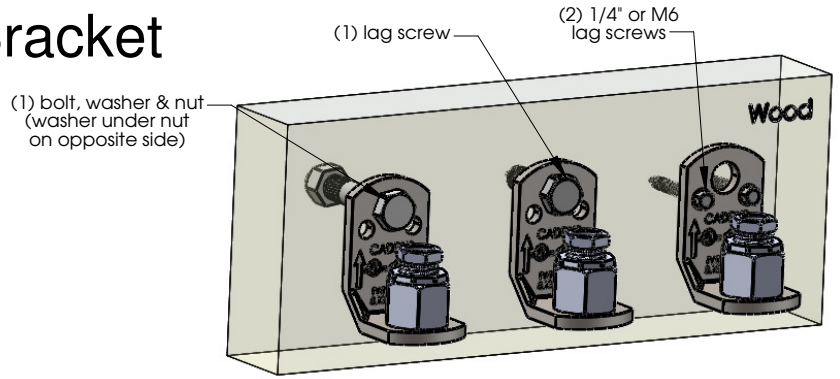


CADDY® ROD LOCK L-Bracket



Part Number	Article Number	Rod Size
CRL37EG	N/A	3/8"
CRLM10EG*	390012	M10
CRLM8EG*	390011	M8

*VdS Approval G413038. Complies with VdS® CEA 4001 (Guidelines for Sprinkler Systems) Chapter 15.2.3 and shall be installed in accordance with VdS CEA 4001.

Part Number (Article Number)	Structure	Fastener Type	Fastener Quantity	Max. UL®203 pipe size (NPS)	Max. FM®1951 pipe size (NPS)	UL2239/ MSS/ General	
						lbs	N
CRL37EG	Concrete	1/2"	1	4" or DN100	4" or DN100	700	3114
	Wood	1/2" x 3" lag screw	1	4" or DN100	4" or DN100	600	2669
		1/2" bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
		1/4" x 1-1/2" lag screw	2	N/A	N/A	300	1334
	Min. 16 Ga. [1.5mm] Steel	1/2" bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
	Min. 14 Ga. [2mm] Steel	1/2" bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
1/4" x 1" self drill or tap screw		2	4" or DN100	3-1/2" or DN90	700	3114	
CRLM10EG (390012)	Concrete	M10	1	4" or DN100	4" or DN100	700	3114
	Wood	M10 x 80mm lag screw	1	2" or DN50	2" or DN50	600	2669
		M10 bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
		M6 x 40mm lag screw	2	N/A	N/A	300	1334
	Min. 16 Ga. [1.5mm] Steel	M10 bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
	Min. 14 Ga. [2mm] Steel	M10 bolt, nut, washer	1	4" or DN100	4" or DN100	700	3114
M6 x 25mm self drill or tap screw		2	4" or DN100	3-1/2" or DN90	700	3114	
CRLM8EG (390011)	Concrete	M10	1	N/A	N/A	500	2224
	Wood	M10 x 80mm lag screw	1	N/A	N/A	500	2224
		M10 bolt, nut, washer	1	N/A	N/A	500	2224
		M6 x 40mm lag screw	2	N/A	N/A	300	1334
	Min. 16 Ga. [1.5mm] Steel	M10 bolt, nut, washer	1	N/A	N/A	500	2224
	Min. 14 Ga. [2mm] Steel	M6 x 25mm self drill or tap screw	2	N/A	N/A	500	2224

WARNING:

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

FM is a registered certification mark of FM Approvals LLC, LTD.
UL is a registered trademark of UL LLC
VdS is a registered trademark of VdS Schadenverhütung GmbH

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.



TECHNICAL SUPPORT:
www.erico.com


CFS457_F 1 OF 2

© 2012, 2013, 2014 ERICO International Corporation




CADDY® ROD LOCK L-Bracket


1 Rotate lock nut counter clockwise until reaches the fully extended position

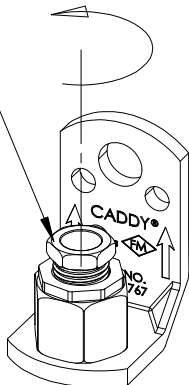


2 Push rod into CADDY ROD LOCK L-Bracket



3 Tighten lock nut

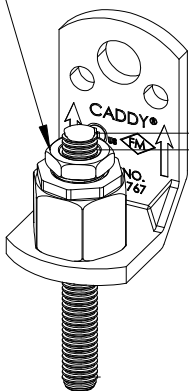

Top of rod must be positioned at or above top of lock nut

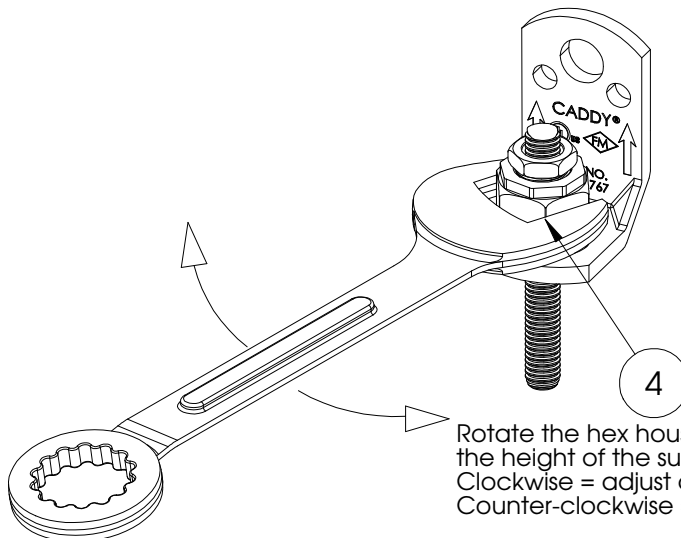

4 Rotate the hex housing to finely tune the height of the supported assembly:
 Clockwise = adjust assembly down
 Counter-clockwise = adjust assembly up



CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:
www.ericco.com

CFS457_F

2 OF 2

© 2012, 2013, 2014 ERICO International Corporation

