

Elexant 4010i

CONNECT AND PROTECT

Single-point heat-tracing controller

PRODUCT OVERVIEW



Elexant 4010i-SSR-FW

The nVent RAYCHEM Elexant 4010i is a compact, full-featured, touch screen based, single-point heat-tracing controller. It provides control and monitoring of Electric Heat Tracing (EHT) circuits for both freeze protection and process temperature maintenance. This controller can monitor and alarm on high and low temperature, high and low current, ground-fault levels, voltage, and supports a host of additional features to offer the utmost in control and monitoring of EHT.

The Elexant 4010i controller is available in two output types: an electromechanical relay (EMR) for use in nonhazardous locations, and a solid-state relay (SSR) for use in nonhazardous and Class I Div. 2 / Zone 2 hazardous locations. The controller is protected by a Fiber reinforced plastic or Stainless steel enclosure, both with front window (-FW or -SW). Multiple communication ports allow flexible connectivity for remote monitoring, configuration, and ease of integration with nVent RAYCHEM Supervisor software or a Distributed Control System (DCS).

Control

The Elexant 4010i measures temperatures of up to three directly-connected temperature sensors. The controller also supports 4-20 mA inputs, allowing the use of external temperature sensor converters with thermocouples or other sensor types. The Elexant 4010i also features line sensing, ambient sensing, Proportional Ambient Sensing Control (PASC), and power limiting modes.

Monitoring

A complete set of parameters are measured, including ground fault, temperature, current and voltage to ensure system integrity. The controller can be set to periodically check the heating cable for faults, alerting maintenance personnel of a heat-tracing problem eliminating costly manual maintenance checks.

A programmable dry contact alarm relay is provided for local or remote alarm annunciation.

Installation

The Elexant 4010i comes ready to install, eliminating the need for custom panel design or field assembly. The IP6x rated FRP or stainless steel enclosures are approved for use in both indoor and outdoor locations. Wiring is as simple as connecting the incoming and outgoing power wiring (up to 277 Vac) and temperature sensors as needed for the application.

The Elexant 4010i provides an intuitive user interface that makes it easy to use and program. No additional programming devices are needed. Alarm conditions and programming settings are easy to read and interpret on the color touch screen. Settings are stored in non-volatile memory in the event of a power failure.


Communication

Elexant 4010i units come equipped with RS485 and Ethernet ports and can be readily connected to a distributed control system (DCS). The units support both the Modbus RTU and Modbus/TCP protocols. The controller may be networked to a host PC running Windows-based nVent RAYCHEM Supervisor software for central programming, status review, and alarm annunciation.


PRODUCT SPECIFICATIONS

Typical enclosure dimensions ([inches] mm)


Elexant 4010i-EMR-SW

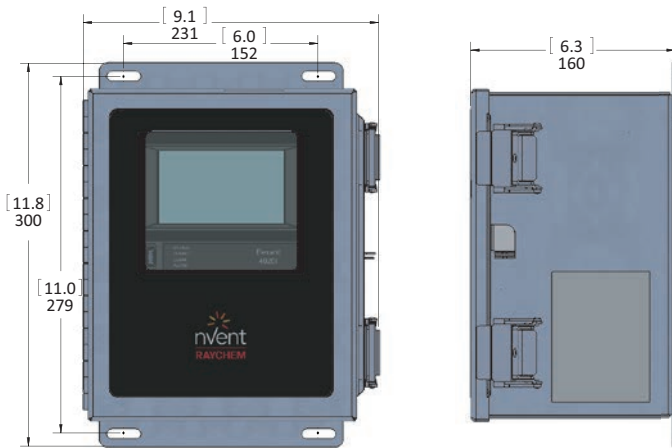


Elexant 4010i-EMR-FW

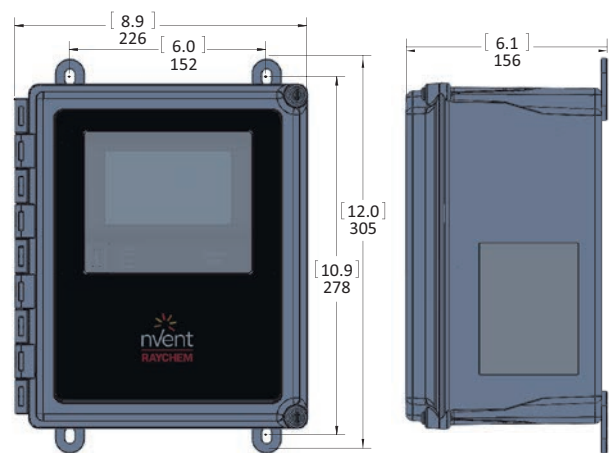

Elexant 4010i-SSR-SW

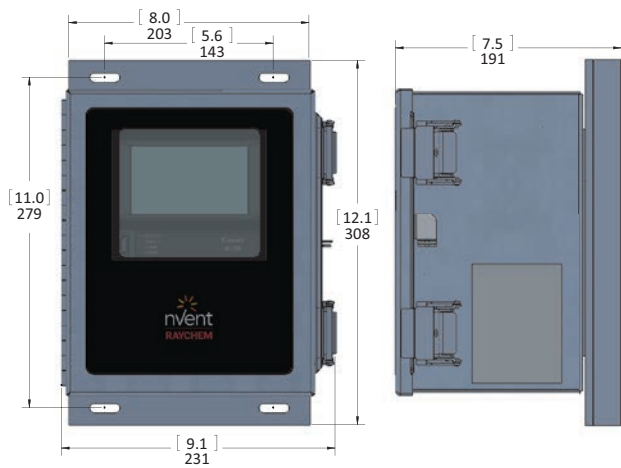

Elexant 4010i-SSR-FW

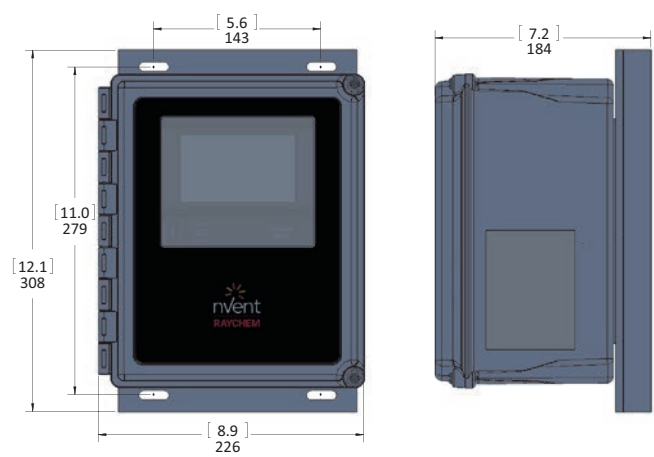

Technical details

| | |
|-------------------------------|--------------------------------------|
| Electromagnetic Compatibility | IEC 61326-1:2012 / EN 61326-1:2013 |
| Supply voltage | 100 Vac to 277 Vac, +/-10%, 50-60 Hz |
| Internal power consumption | < 24 W |

Environmental

| | |
|-------------------------------|--|
| Protection | Type 4X, IP64 (FRP enclosure) Type 4X, IP66 (stainless steel enclosure) |
| Materials | Fiber-Reinforced Plastic (FRP) or stainless steel (SS304) |
| Ambient operating temperature | -40°C to 60°C (-40°F to 140°F) |
| Ambient storage temperature | -55°C to 85°C (-67°F to 185°F) |
| Relative humidity | 0% to 90%, noncondensing |
| Environment | PD2, CAT III |
| Max altitude | 2,000 m (6,562 ft) |

Control

| | |
|--------------------|--|
| Relay Type | Double-pole, mechanical (EMR versions) Double-pole, solid-state (SSR versions) |
| Voltage, maximum | 277 Vac nominal, 50/60 Hz |
| Current, maximum | 32 A @ 40°C, de-rated to 24 A @ 50°C and further de-rated to 16 A @ 60°C (EMR) 32 A @ 40°C, de-rated to 24 A @ 50°C and further de-rated to 16 A @ 60°C (SSR) |
| Control algorithms | EMR: On/Off, PASC, always on, always off SSR: On/Off, proportional, PASC, always on, always off |
| Control Range | -200°C to 700°C (-328°F to 1292°F) |

Mounting

| | |
|---------------------------------|--|
| FRP enclosure with EMR (EMR-FW) | Surface mounting with four holes on 152 mm x 278 mm (6.0 in x 10.9 in) centers Hole diameter: 8 mm (0.3 in) |
| FRP enclosure with SSR (SSR-FW) | Surface mounting with four holes on 143 mm x 279 mm (5.6 in x 11.0 in) centers Hole diameter: 8 mm (0.3 in) |
| SS enclosure with EMR (EMR-SW) | Surface mounting with four holes on 152 mm x 279 mm (6.0 in x 11.0 in) centers Hole diameter: 8 mm (0.3 in) |
| SS enclosure with SSR (SSR-SW) | Surface mounting with four holes on 143 mm x 279 mm (5.6 in x 11.0 in) centers Hole diameter: 8 mm (0.3 in) |

Monitoring

| | | |
|--------------|--------------------------|---|
| Temperature | Low alarm range | -200°C to 700°C (-328°F to 1292°F) or OFF |
| | High alarm range | -200°C to 700°C (-328°F to 1292°F) or OFF |
| Ground fault | Alarm range | 10 mA to 500 mA or OFF |
| | Trip range | 10 mA to 500 mA or OFF |
| Current | Low alarm range | 0.1 A to 100 A or OFF |
| | High alarm range | 0.1 A to 100 A or OFF |
| | Power limit range | 8 W to 30 kW |
| Voltage | Low alarm range | 80 Vac to 300 Vac or OFF |
| | High alarm range | 80 Vac to 300 Vac or OFF |
| Resistance | Low resistance range | 1% to 100% of deviation from nominal |
| | High resistance range | 1% to 250% of deviation from nominal |
| Autocycle | Diagnostic test interval | 1 to 750 hours |

Temperature sensor inputs

Standard

| | |
|----------|--|
| Quantity | 3 Each can be individually set to one of the types below. |
|----------|--|

Types

| | |
|----------------------|--|
| 100Ω platinum RTD | 3-wire, $\alpha=0.00385$ ohms/ohm/°C -200°C to 700°C (-328°F to 1292°F), $\pm 1^\circ\text{C}$ Can be extended with a 3-conductor shielded cable of 20 Ω maximum per conductor |
| 100Ω nickel iron RTD | 2-wire, $\alpha=0.00599$ ohms/ohm/°C -73°C to 350°C (-99°F to 662°F), $\pm 1^\circ\text{C}$ Can be extended with a 2-conductor shielded cable of 20 Ω maximum per conductor |
| 100Ω nickel RTD | 2-wire, $\alpha=0.00618$ ohms/ohm/°C -70°C to 250°C (-94°F to 482°F), $\pm 1^\circ\text{C}$ Can be extended with a 2-conductor shielded cable of 20 Ω maximum per conductor |
| Thermocouple | Requires external 4-20 mA converter 4-20 mA current loop, ± 0.05 mA, 24 Vdc loop power |

The Elexant 4010i-IS variants are equipped with intrinsic safety barriers at the RTD inputs.

RTD Intrinsic Safety Associated Apparatus Entity Parameters

| | |
|-------------------------------------|---|
| Uo (Maximum Output Voltage): 5.4V | La (Maximum External Inductance): 2mH |
| Io (Maximum Output Current): 0.083A | Ca (Maximum External Capacitance): 65uF |
| Po (Maximum Output Power): 0.449W | |

Digital inputs

| | |
|----------|---|
| Quantity | Two multi-purpose inputs for connection to external dry (voltage free) contact or DC voltage May be configured for Hand-Off-Auto (HOA) operation |
| Rating | 100 Ω max loop resistance or 5-24 Vdc @ 1 mA maximum |

Outputs

| | |
|------------------|--|
| Alarm Relay | Form-C dry contact: 00 Vac to 277 Vac, 3A 50/60 Hz |
| Auxiliary Output | 24 Vdc, max load of 250 mA @ 40°C, de-rated to 165 mA @ 60°C |

Configuration

| | |
|--------------------------|---|
| Method | Touch screen display |
| Units | °F or °C |
| Idle display | Sensor temperature, control temperature, heater current, voltage, power, alarm status |
| LEDs | Status, heater on, alarm conditions, receive / transmit data |
| Memory | Nonvolatile, restored after power loss, checksum data checking |
| Stored usage parameters | Minimum and maximum process temperature, maximum ground-fault current, minimum and maximum voltage, maximum heater current, power accumulator, contactor cycle count, total time in use, heater on time |
| Alarm conditions | Low / high temperature, low / high current, low / high voltage, low / high resistance, ground-fault alarm / trip, RTD failure, loss of programmed values, EMR or SSR failure, equipment protection trip, attached device alarm, contactor lifetime exceeded |
| Alarm Modes | Normal (solid on), flash (on & off), toggle (re-ringing new alarms) |
| Control Algorithms | EMR: On/Off, PASC, always on, always off SSR: On/Off, proportional, PASC, always on, always off |
| Equipment Protection | Ground fault trip, low / high temperature limit, Soft-Start features, (heat trace output limiting, SSR overcurrent protection, circuit breaker nuisance trip prevention) |
| Load Shedding | Up to 8 zones, with temperature failsafe and communication timeout (requires nVent RAYCHEM Supervisor) |
| Profiles | Built-in default setting profiles for common heat trace applications Up to two additional user configurations can be saved and reloaded. Saved configurations can be saved to, and loaded from, a USB thumb drive |
| Network | Automatic network configuration with DHCP, or static IP configuration |
| Firmware Updates | User updateable using a USB thumb drive |
| Multi-language Interface | English, French, German, Spanish, Russian |
| Other | Password protection, text tags / identifiers for controller and temperature sensors |

Connection terminals

| | |
|----------------------------------|--|
| Power supply input | Screw terminals, 0.2 – 16.8mm ² (24 – 5 AWG) |
| Heating cable output | Screw terminals, 0.2 – 16.8mm ² (24 – 5 AWG) |
| Torque range for screw terminals | 1.2 – 1.5 Nm |
| Ground (Earth) | Three box lugs, 2.0 – 33.6 mm ² (14 – 2 AWG) |
| Sensor / Other terminals | Cage clamp terminals, 0.08 – 3.3 mm ² (28 – 12 AWG) |

Cable entries

| | | |
|---------------------------|-------------------------------|---|
| Fiberglass enclosure | 3 x M16 2 x M20 2 x M25 | for temperature sensors, 2 x stopping plugs and 1 x rain plug For communication and/or alarm relay, all with stopping plugs 1 x gland (GL-55-M25), Ø 8-15 mm for power cable in 1 x rain plug for heat-tracing cable out |
| Stainless steel enclosure | 3 x M16 2 x M20 2 x M25 | for temperature sensors, 2 x stopping plugs and 1 x rain plug For communication and/or alarm relay, all with stopping plugs 2 x rain plugs for power cable in and heat-tracing cable out |

Communications

RS-485

| | |
|-----------|--------------------------------|
| Type | 2-wire RS-485 |
| Cable | One shielded twisted pair |
| Length | 1,200 m (4,000 ft.) maximum |
| Quantity | Up to 247 devices per port |
| Data Rate | 9600, 19.2k, 38.4k, 57.6k baud |
| Parity | None, even, odd |
| Stop bits | 0, 1, 2 |
| Tx delay | 0 – 5 seconds |
| Protocol | Modbus RTU |

Ethernet

| | |
|----------------------|----------------------|
| Type | 10/100 Base-T |
| Length | 100 m (328 ft) max |
| Data rates | 10 or 100 MB/s |
| Protocol | Modbus/TCP, DHCP |
| Connection terminals | Shielded 8-pin RJ-45 |

APPROVALS

For use in ordinary (EMR versions) and hazardous area Zone 2 (Gas), and Class I Division 2 (SSR version)

Temperature classification

T4

Product certification

Ordinary area



Hazardous area (SSR version only)



* Pending

For certifications in other regions (FM, CSA, IEx etc.), please refer to the installation manual.

More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nvent.com/RAYCHEM

ORDERING INFORMATION

| Description | Catalog number | Part number | Weight (kg/lbs) |
|---|-----------------------|------------------------|-----------------|
| Elxant 4010i controller in an 20 cm x 25 cm FRP enclosure with window. Controls a single circuit with a 2-pole electromechanical relay (32A EMR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-009 | 4010i-EMR-IS-FW (EMEA) | 4.6/10.2 |
| (Approved for nonhazardous locations only. RTDs may be placed in Zone 0/Zone 1/Zone 2 locations) | | | |
| Elxant 4010i controller in an 20 cm x 25 cm stainless steel enclosure with window. Controls a single circuit with a 2-pole electromechanical relay (32A EMR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-011 | 4010i-EMR-IS-SW (EMEA) | 6.6/14.6 |
| (Approved for nonhazardous locations only. RTDs may be placed in Zone 0/Zone 1/Zone 2 locations) | | | |
| Elxant 4010i controller in an 20 cm x 25 cm FRP enclosure with window. Controls a single circuit with a 2-pole solid-state relay (32A SSR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-010 | 4010i-SSR-IS-FW (EMEA) | 6.6/14.6 |
| (Approved for Zone 2 hazardous locations. RTDs may be placed in Zone 0/Zone 1/Zone 2 locations) | | | |
| Elxant 4010i controller in an 20 cm x 25 cm stainless steel enclosure with window. Controls a single circuit with a 2-pole solid-state relay (32A SSR). Includes intrinsically safe barriers on RTD inputs with power cable gland. | 10380-012 | 4010i-SSR-IS-SW (EMEA) | 8.6/19.0 |
| (Approved for Zone 2 hazardous locations. RTDs may be placed in Zone 0/Zone 1/Zone 2 locations) | | | |
| RTD Sensors | | | |
| Temperature Sensor with 2 m flexible cable and M16 gland, Pt100 | MONI-PT100-260/2 | 1244-006615 | 0.14/0.3 |
| Temperature Sensor with 5 m flexible cable and M16 gland, Pt100 | MONI-PT100-260/5 | 1244-020817 | 0.35/0.8 |
| Temperature Sensor with 10 m flexible cable and M16 gland, Pt100 | MONI-PT100-260/10 | 1244-020816 | 0.7/1.5 |
| Temperature Sensor with 2 m MI Cable and Junction Box, Pt100, ATEX | MONI-PT100-EXE | 967094-000 | 0.5/1.1 |
| Temperature Sensor with 2 m MI Cable and M16 gland, Pt100, ATEX | MONI-PT100-EXE-SENSOR | 529022-000 | 0.13/0.3 |

nVent RAYCHEM Supervisor Software

Available for download at www.nVent.com

North America

Tel +1.800.545.6258
 Fax +1.800.527.5703
thermal.info@nVent.com

Europe, Middle East, Africa

Tel +32.16.213.502
 Fax +32.16.213.604
thermal.info@nVent.com

Asia Pacific

Tel +86.21.2412.1688
 Fax +86.21.5426.3167
cn.thermal.info@nVent.com

Latin America

Tel +1.713.868.4800
 Fax +1.713.868.2333
thermal.info@nVent.com



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER